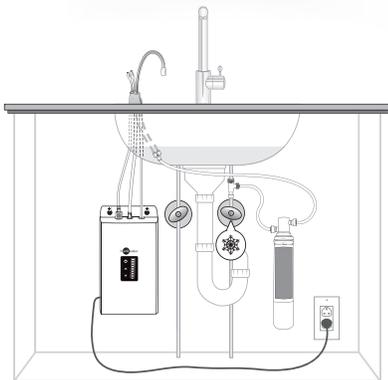# insinkerator™

Instant Hot Water Systems

NeoTank™ - International
Model: NXT

Stainless Steel Tank dispenses filtered steaming hot water instantly.

Water tap sold separately.

Submittal Sheet

- 2.5 litre stainless steel tank
- Easy to adjust electronic temperature control from 88 - 98ºC
- Maintains the precise temperature setting ±0.5ºC
- Tool-free tank connections and dry start protection to ease installation
- 220-240 volts, 1300 watts, 5.7 amps
- For use with InSinkErator instant hot water taps, integrated faucets and filtration systems
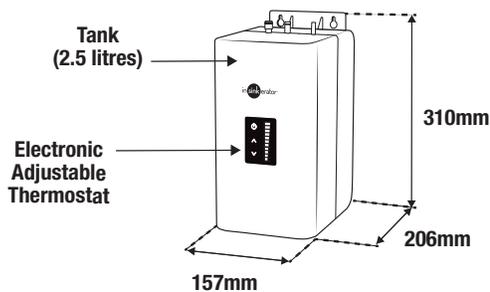- Unit not for commercial/industrial use

Sample Specification

Instant hot water tap(s) shall be equipped with an InSinkErator NXTF stainless steel tank with filtration, adjustable internal water temperature from 88˚C to 98˚C with self-closing hot valve.

In-Home Parts and Service Limited Warranty*
Tank: 2-years
Filtration System: 1-year
(excluding replaceable filter cartridge)

* The complete InSinkErator warranty is included in the Care & Use booklet packed with each unit.

Specifications

Capacity	2.5 litre stainless steel tank
Electrical	220-240 volts, A.C., 1300 watts, 5.7 amp heating element with grounded plug
Thermostat	Electronic adjustable from 88˚C to 98˚C (factory pre-set at 96˚C)
Insulation	Meets U.L. 94HF-1 flammability specification
Recommended Supply Pressure	1.7-8.6 bar
Shipping Weight	Approximately 2.7 kg Tank, 4.7 kg w/filtration system

Dimensions

Tank (2.5 litres)

Electronic Adjustable Thermostat

310mm

206mm

157mm

CE WRAS APPROVED PRODUCT